




FS plywood

For the perfect concrete finish

The best plywood for all applications

We are
WACO

www.formscaff.com

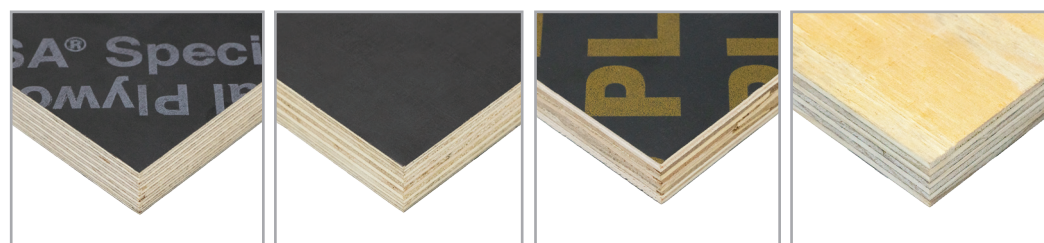

INFORMATION		 form-birch	 form-plex	 form-patch	 form-pine
TYPE	Quality	Premium	Medium	Standard	Uncoated
	Re-Used*	Up to 40	Up to 12	Up to 5	Varies
	*The given number of re-uses are indicative values, the actual number may vary depending on the application and site conditions.				
	Origin	Eurasia	Asia	Asia	South America/ Local SA
	Standard	EN315	EN314-1/-2, EN310	Chinese Local Standard	SANS 929:2008 or Other
	Applications	Walls, Slabs & Climbing Formwork	Decking & Patch	Patching & Foundations	Decking & Patching
CORE	Wood	Birch	Poplar	Fresh Poplar/ Eucalyptus	Pine
	Number of Veneers Only applies to 21mm Plywood	15	13	11 to 13	Varies
	Veneer Type	Full Size Single Veneer	Poplar 127*64/84cm	3/4 Jointed	Varies
	Glue	Phenol Resin	WBP Phenolic	WBP Melamine	WBP Phenolic
	Boiling Time (hr)	450	72	4	Varies
SURFACE	Coating	Dynea Brown Film	Dynea Brown Film	Chinese Film	Uncoated
	Film (g/m ²)	220 & 120	120	180	Uncoated
	Edge Sealing	Acrylic Phenol Varnish	BengTeng Paint	Paint	Uncoated
SIZES	Dimension (mm) Product Code Mass (kg/m ²)	2500 x 1250 x 21 5120168 15.44 kg/m ²	2500 x 1250 x 21 5120191 12.16 kg/m ²	2440 x 1220 x 21 5120060 12.9 kg/m ²	2440 x 1220 x 21 (50) 3500325 11.42 kg/m ²
		2700 x 1220 x 21 5120160 15.44 kg/m ²		2440 x 1220 x 18 5120203 9.74 kg/m ²	2440 x 1220 x 18 (50) 3500327 9.74 kg/m ²
	Tolerance (mm)	-0.9 / +0.7	±0.5	±1.0	±0.5
	Sheets Per Bundle	19	43	40	55

